
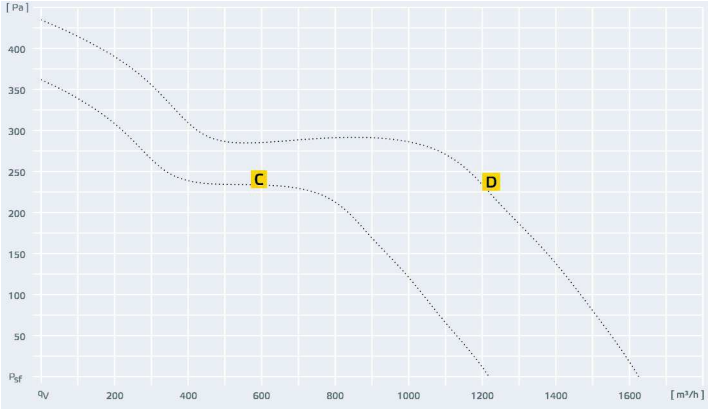


ETAMASTER



Highly efficient, three speed levels

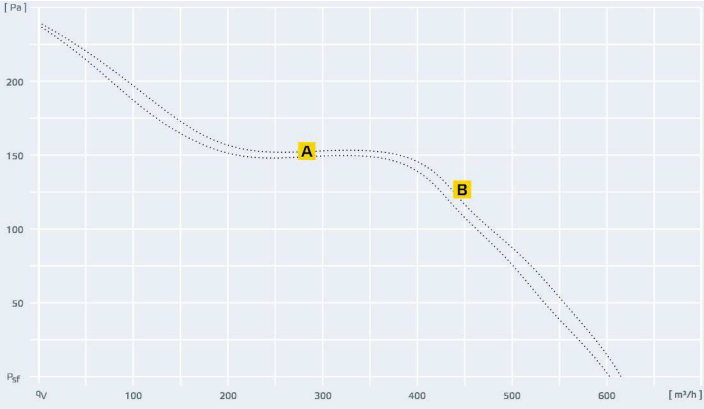

Type	U_N			f_N	I_{max}	P_N	V	η_t	Motor control	Sound power	Weight	Dimensions	3-step switch	Isolator Switch
	V	Hz	A			W	m³/h	%		dB(A)	kg	mm	MTS	GS
A EM 150L E2M 01 126547	230V ~	50	0,3	46	600	37	36925			L _{WA5} 69	2,4	D 149	A 10 128145	03 107633
										L _{WA6} 67		L 309		
										L _{WA2} 57				
B EM 160 E2M 01 126549	230V ~	50	0,3	45	615	38	36925			L _{WA5} 66	2,5	D 159	B 10 128145	03 107633
										L _{WA6} 66		L 289		
										L _{WA2} 57				
C EM 200 E2M 01 127249	230V ~	50	0,6	117	1220	46	36925			L _{WA5} 72	4,0	D 199	C 10 128145	03 107633
										L _{WA6} 74		L 325		
										L _{WA2} 59				
D EM 250 E2M 01 127317	230V ~	50	0,8	170	1625	50	36925			L _{WA5} 75	5,7	D 249	D 10 128145	03 107633
										L _{WA6} 78		L 215		
										L _{WA2} 61				
E EM 280 E2M 01 130471	230V ~	50	1,1	239	2170	53	36925			L _{WA5} 77	7,7	D 279	E 10 128145	03 107633
										L _{WA6} 80		L 280		
										L _{WA2} 63				
F EM 315 E2M 01 130677	230V ~	50	2,1	436	3180	56	36925			L _{WA5} 82	12,4	D 314	F 10 128145	03 107633
										L _{WA6} 84		L 300		
										L _{WA2} 68				
G EM 400 E4M 01 129165	230V ~	50	1,0	211	3300	51	36925			L _{WA5} 71	15,7	D 399	G 10 128145	03 107633
										L _{WA6} 75		L 350		
										L _{WA2} 57				

L_{WA5} = Inlet - sound power level, L_{WA6} = Outlet - sound power level, L_{WA2} = Casing - sound power level

- 3 speed steps selectable through an external step switch
- Corrosion-resistant plastic housing

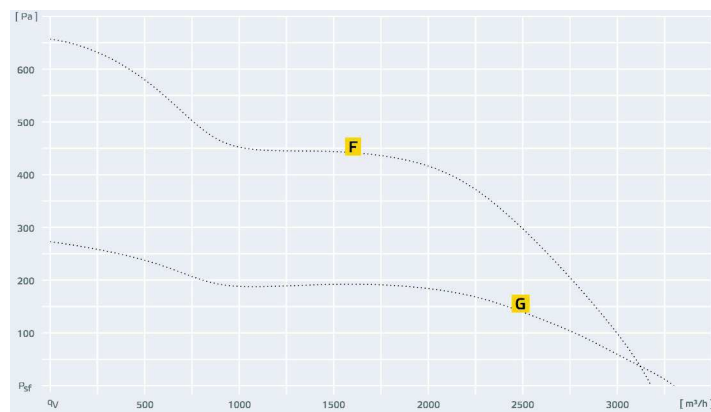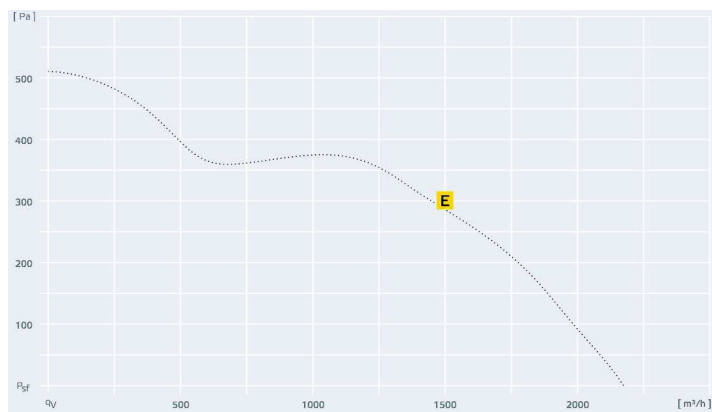

Fast clamps



Back Draught Shutter



Back Draught Shutter With seal



Protection Grille



Duct Silencer, rigid



Duct Silencer, flexible



Filter Box



Filter Box





Filter Box

	VM	RSK	RSK...D	SG...01	SDS	SDF	FV	FT	FTW	
A	150 102648	150 102660	150 113484	150 102896	150 102714	150 102702	150 112680	150 112842	150 112851	
B	160 102649	160 102661	160 113485	160 102897	160 102717	160 102703	160 112831	160 112841	160 112852	
C	200 102650	200 102662	200 113487	200 102898	200 102719	200 102704	200 112832	200 112840	200 112853	
D	250 102651	250 102686	250 113488	250 102899	250 102721	250 102705	250 112833	250 112845	250 112854	
E	280 115494				280 115243					
F	315 102652	315 102664	315 113489	315 102900	315 102723	315 102706	315 112834	315 112846	315 112855	
G	400 102654	400 102691	400 113490		400 102727	400 102708	400 112836	400 112848	400 112857	

ETAMASTER ... EC



High efficiency, EC motor

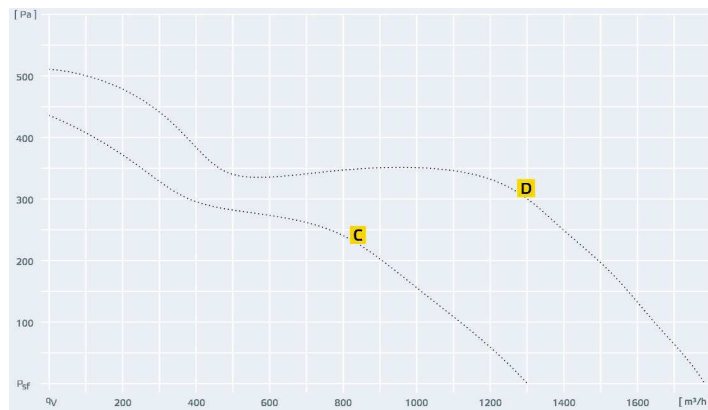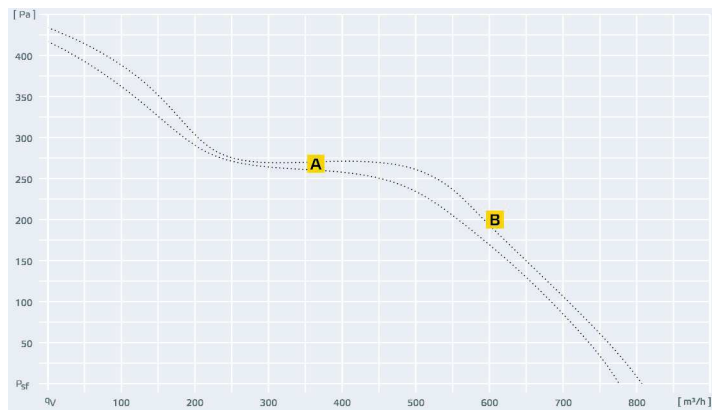

Type	U _N	f _N	I _{max.}	P _N	V̇	η _t	Motor control	Sound power	Weight	Dimensions	 Potentiometer  Constant pressure control  Sensor  Isolator Switch			
	V	Hz	A	W	m³/h	%		dB(A)	kg	mm	MTP	CON P	SEN CO2	GS
A EM 150L EC 01 128588	230V ~	50	0,6	67	780	53	0-10V	L _{WA5} 74 L _{WA6} 75 L _{WA2} 56	2,4	D 149 L 309	A 20 128146	1000 115259	2 126586	03 107633
B EM 160 EC 01 128586	230V ~	50	0,7	73	810	53	0-10V	L _{WA5} 72 L _{WA6} 75 L _{WA2} 55	2,6	D 159 L 289	B 20 128146	1000 115259	2 126586	03 107633
C EM 200 EC 01 130561	230V ~	50	1,0	121	1300	48	0-10V	L _{WA5} 77 L _{WA6} 79 L _{WA2} 62	3,2	D 199 L 325	C 20 128146	1000 115259	2 126586	03 107633
D EM 250 EC 01 128954	230V ~	50	1,5	179	1780	64	1-10V	L _{WA5} 76 L _{WA6} 79 L _{WA2} 66	5,7	D 249 L 215	D 20 128146	1000 115259	2 126586	03 107633
E EM 250L EC 02 130491	230V ~	50	2,1	304	2175	62	0-10V	L _{WA5} 82 L _{WA6} 86 L _{WA2} 67	4,1	D 249 L 215	E 20 128146	1000 115259	2 126586	03 107633
F EM 280 EC 01 130701	230V ~	50	1,9	267	2440	62	0-10V	L _{WA5} 82 L _{WA6} 83 L _{WA2} 75	5,6	D 279 L 280	F 20 128146	1000 115259	2 126586	03 107633
G EM 315 EC 01 130708	230V ~	50	2,0	282	2960	57	0-10V	L _{WA5} 77 L _{WA6} 80 L _{WA2} 69	6,9	D 314 L 300	G 20 128146	1000 115259	2 126586	03 107633
H EM 355 EC 01 130712	230V ~	50	1,8	261	3320	57	0-10V	L _{WA5} 73 L _{WA6} 76 L _{WA2} 63	8,7	D 354 L 325	H 20 128146	1000 115259	2 126586	03 107633

- Highest energy efficiency through electronically commutated permanent magnet motors
- Additional energy savings by steplessly adjusting the air flow volume to the actual demand
- Corrosion-resistant plastic housing

EM ... EC

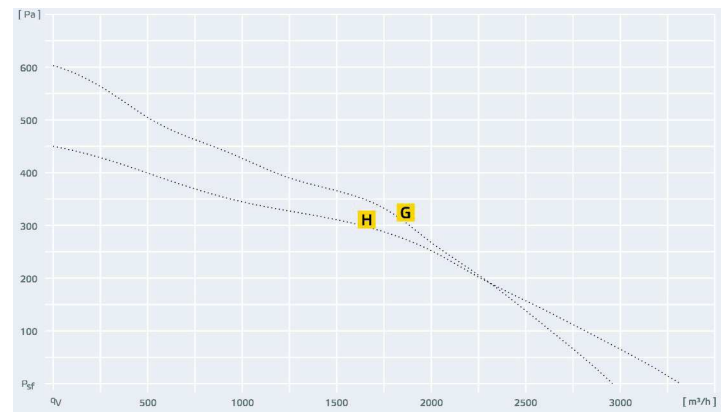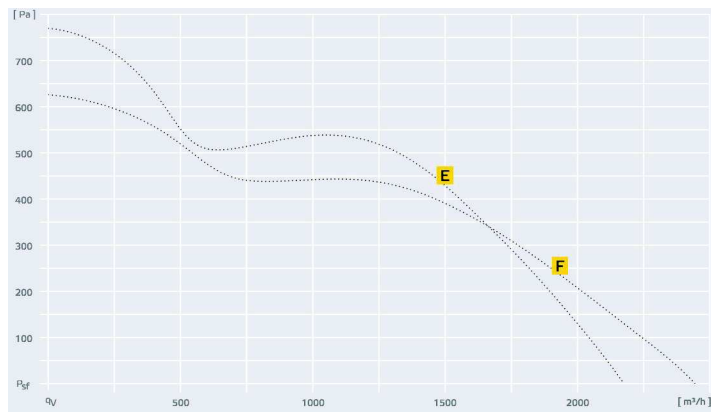

Fast clamps



Back Draught Shutter



Back Draught Shutter With seal



Protection Grille



Duct Silencer, rigid



Duct Silencer, flexible



Filter Box



Filter Box



Filter Box

	VM	RSK	RSK...D	SG...01	SDS	SDF	FV	FT	FTW	
A	150 102648	150 102660	150 113484	150 102896	150 102714	150 102702	150 112680	150 112842	150 112851	
B	160 102649	160 102661	160 113485	160 102897	160 102717	160 102703	160 112831	160 112841	160 112852	
C	200 102650	200 102662	200 113487	200 102898	200 102719	200 102704	200 112832	200 112840	200 112853	
D	250 102651	250 102686	250 113488	250 102899	250 102721	250 102705	250 112833	250 112845	250 112854	
E	250 102651	250 102686	250 113488	250 102899	250 102721	250 102705	250 112833	250 112845	250 112854	
F	280 115494				280 115243					
G	315 102652	315 102664	315 113489	315 102900	315 102723	315 102706	315 112834	315 112846	315 112855	
H	355 102653	355 102665	355 113491	355 102901	355 102725	355 102707	355 112835	355 112847	355 112856	